
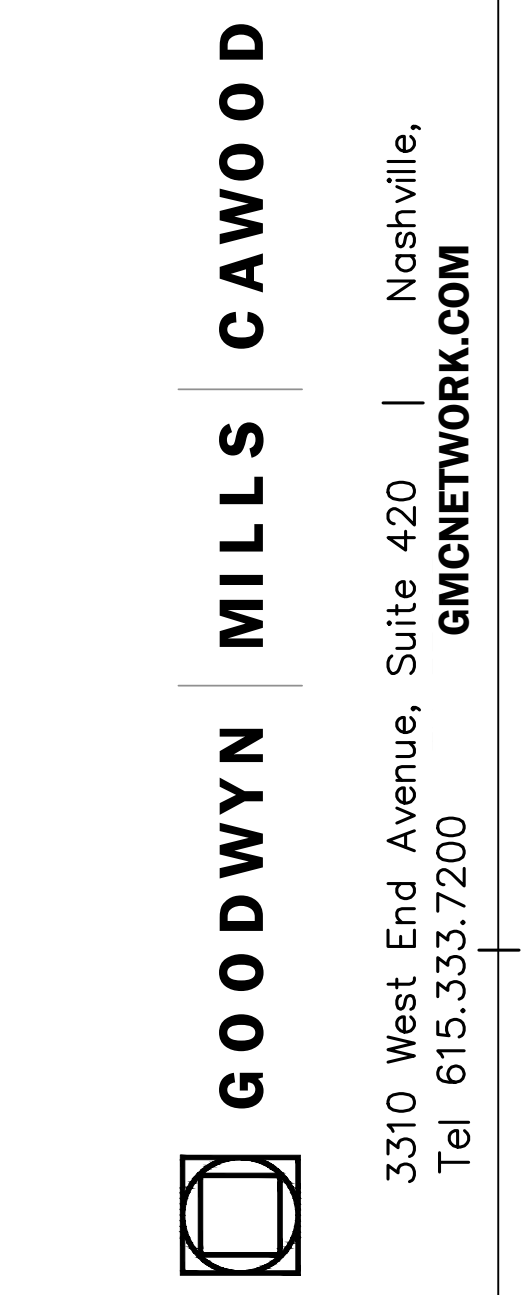
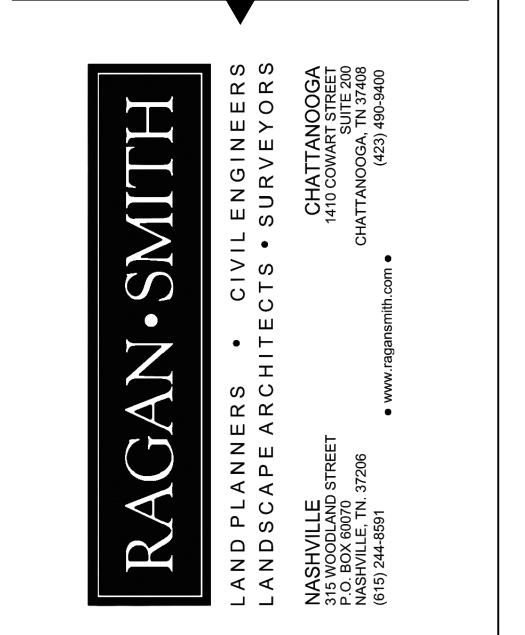
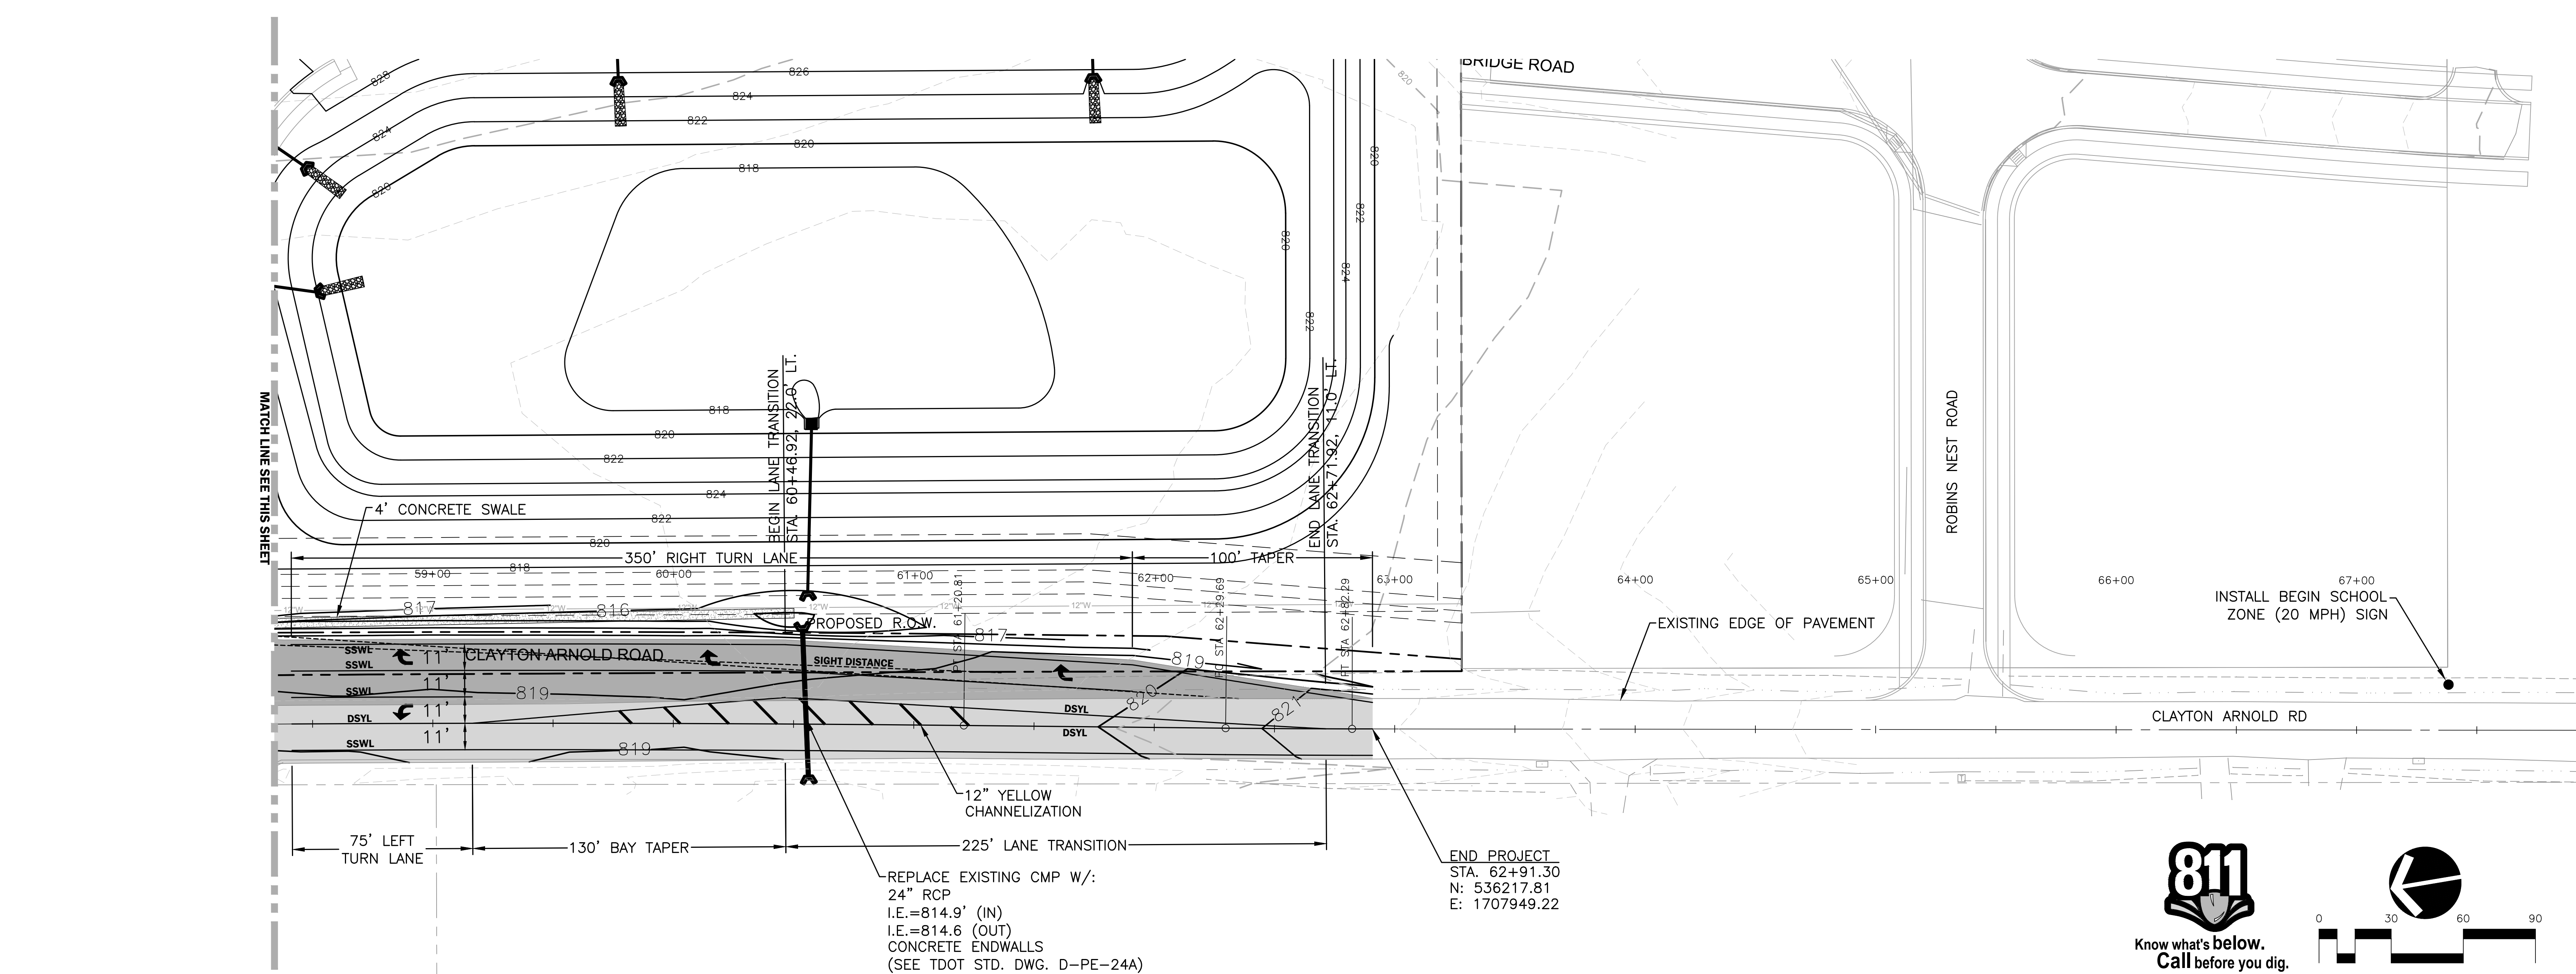


**CLAYTON ARNOLD ROAD**  
STA. 51+00.54 TO STA. 62+91.30

**NOTES:**  
A. STANDARD WIDTH IS 4.0 FT. WIDTH IS 2.0 FT. ALONG RIGHT TURN LANE FROM STA. 59+41.92 TO STA. 62+91.30  
B. WIDTH VARIES FROM 0.0' AT STA. 51+00.54 TO 11.0' AT STA. 53+25.54, WIDTH IS 11.0' FROM STA. 53+23.54 TO STA. 60+46.92, WIDTH VARIES FROM 11.0' AT STA. 60+46.92 TO 0.0' AT STA. 62+71.92.

PROPOSED PAVEMENT SCHEDULE	
1.	MINERAL AGGREGATE BASE - 10.00" 303-01 MINERAL AGGREGATE TYPE "A" BASE, GRADING "D"
2.	PRIME COAT 402-01 BITUMINOUS MATERIAL FOR PRIME COAT (PC) AT 0.30-0.35 GAL./S.Y. 402-02 AGGREGATE FOR COVER MATERIAL (PC) AT 8-12 LBS./S.Y.
3.	TACK COAT 403-01 BITUMINOUS MATERIAL FOR TACK COAT (TC) AT 0.02 GAL./S.Y.
4.	BITUMINOUS BASE - 4.00" 307-02.01 ASPHALT CONCRETE MIX (PG70-22)(BPMB-HM), GRADING "A" (APPROXIMATELY 460 LBS./S.Y.)
5.	BITUMINOUS BINDER - 2.00" 307-02.08 ASPHALT CONCRETE MIX (PG70-22)(BPMB-HM), GRADING "B-M2" (APPROXIMATELY 229 LBS./S.Y.)
6.	BITUMINOUS SURFACE - 1.50" 411-02.10 ASPHALT CONCRETE MIX (PG70-22)(ACS) GRADING "D" (APPROXIMATELY 132.3 LBS./S.Y.)

**LEGEND:**  
 FULL-DEPTH ASPHALT  
 1.5" OVERLAY ONLY  
 SSWL = SINGLE SOLID WHITE LINE  
 DSYL = DOUBLE SOLID YELLOW LINE

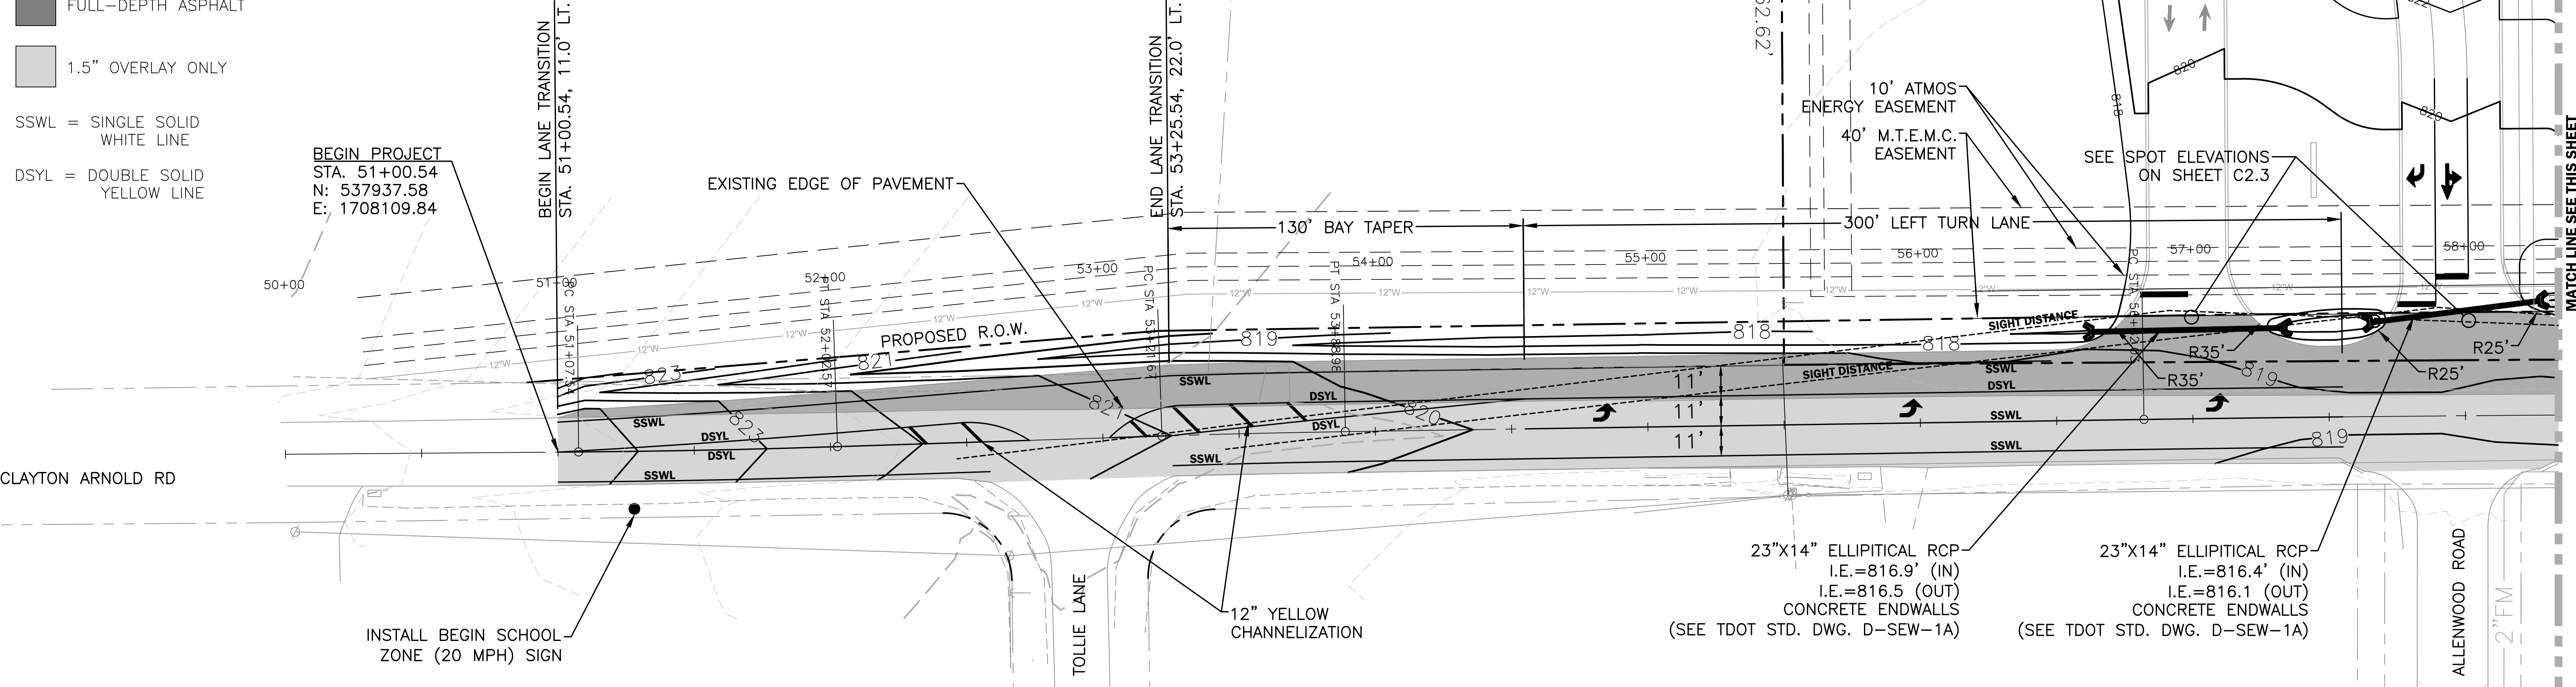

ISSUE	DATE
PERMIT SET	04.04.16
BID SET	05.20.16
TOWN CMTS.	06.06.16

drawn by: D.SIEBERG  
checked by: B.SMITH

THOMPSON'S STATION K-8  
THOMPSON'S STATION, TN 37179

CLAYTON ARNOLD RD. IMPROVEMENT  
PROPOSED LAYOUT

CLAYTON ARNOLD RD. IMPROVEMENT  
PROPOSED LAYOUT

**TL1.1**  
Sheet of

1/21/2016 9:31:30 AM